

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/087606 A1

(51) International Patent Classification⁷:

B65D 51/28

(21) International Application Number:

PCT/GB2005/000787

(22) International Filing Date: 2 March 2005 (02.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0405286.6 9 March 2004 (09.03.2004) GB

(71) Applicant (for all designated States except US): WENDON LIMITED [GB/GB]; Drysgoed Farm, Efailisaf, Pontypridd, Mid Glamorgan CF38 1SN (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PARKER, Rodney, Julian [GB/GB]; Drysgoed Farm, Efailisaf, Pontypridd, Mid Glamorgan CF38 1SN (GB).


(74) Agents: CHETTLE, Adrian, John et al.; Withers & Rogers LLP, Goldings House, 2 Hays Lane, London SE1 2HW (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: VOLUMETRIC DISPENSER

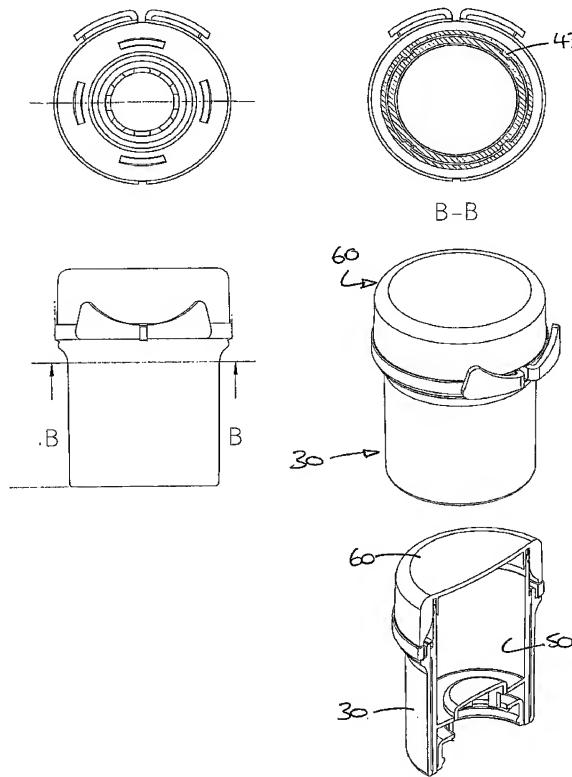

(57) Abstract: A shot dispenser comprises a housing (30), and a chamber (50) having a cap (60). The chamber is movable axially of the housing to open an outlet whereby the contents of the chamber can drain past the base. A tear band (32, 33) prevents movement of the chamber until removed. The dispenser permit mixing of two liquids just prior to use.

WO 2005/087606 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*